

FLAME

HOT WORKS UTILITY FALL ARREST HARNESS

HFSF017

The Flame is light-weight Non-flammable general-purpose hot works harness for working environments where spark and heat pose a danger, such as grinding, gas cutting and welding.

Made from Kevlar-Nomex webbing, the harness is built to resist flames under EN 358 cl.4.1.5 and suitable for explosion hazard zones.

Weighing as little as 1150 grams, this full-body harness features front and rear fall arrest attachment points; including a dorsal extension with Velcro stowage, and front quick connect buckles on the legs and chest.






RATING: 140kg

LIFESPAN: Up to 10 Years

CERTIFICATION:
EN 361:2002, AS/NZS 1891.1:2007

EN 361:2002 Personal protective equipment against fall from a height. Full body harnesses
AS/NZS 1891.1:2007 Harnesses and ancillary equipment

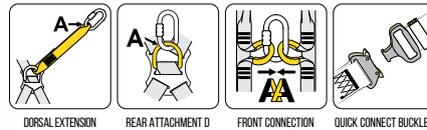

DORSAL STERNAL

| MODEL | SIZE | WEIGHT (G) | DIMENSIONS | MATERIAL | RATING (KG) |
|------------|------|------------|------------------|--|-------------|
| HFSF017UNI | UNI | 1150g | 85 - 120cm waist | Polyester webbing 45mm Steel hardware | 140kg |
| HFSF017XXL | XXL | 1200g | 90 - 140cm waist | | |

PRODUCT FEATURES

- Front fall arrest attachment point.
- Rear fall arrest D-ring attachment point with dorsal extension.
- Quick connect adjustable buckles with connection indicator.
- Non-flammable Kevlar-Nomex webbing.
- Resistant to flames under EN 358 P.4.1.5 standard.
- Lanyard stowage points.
- Fall indicators.
- Velcro covered harness labelling.
- Forged steel hardware.
- Available in 2 sizes.



This product is subject to a 6 monthly detailed inspection. A rescue plan should be in place to deal with any emergencies that could arise.



ZERO HEIGHT SAFETY LIMITED

AUSTRALASIA
10 Holt Place, Harewood,
Christchurch 8053, New Zealand
sales.nz@zeroheightsafety.com

EUROPE & UK
Badenerstrasse 122,
5466 Kaiserstuhl, Switzerland
sales.eu@zeroheightsafety.com

