


TACTIX 12MM

12MM KERNMANTLE STATIC ROPE

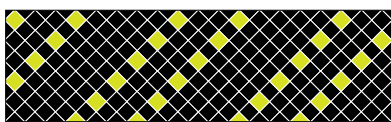

ZT12

The popular low stretch, high strength, kernmantle rope is ideal for industrial abseiling, general industry, rescue lifeline use, work positioning and restraint.

The high proportion of sheath to cover ratio provides improved abrasion protection and reduced sheath slippage. Manufactured with the highest standard with premium quality yarns, the most modern of machinery and a stringent quality control process.

Tactix has an excellent compatibility with all leading brands of hardware and available in 3 sizes, per metre of the roll, in cut lengths, or rolls.

SIZE: 12mm

RATING: 4,205kg

CERTIFICATION:

EN1891:1998, AS 4142.3-1993


EN 1891:1998 Personal protective equipment for the prevention of falls from a height. Low stretch kernmantle ropes

AS 4142.3-1993 Fibre ropes - Man-made fibre rope for static life rescue lines



MODEL	SIZE	WEIGHT (G)	DIMENSIONS	MATERIAL	RATING (KG)
ZT12	per metre		12mm diameter	Polyester	4,205kg

PRODUCT MAKE	CODE	LENGTH PER UNIT MASS	BREAKING FORCE	KNOT BREAKING FORCE	IMPACT STRENGTH INDEX	ELONGATION @ 80 KG / 375 KG:	ELONGATION @ BREAK	KNOT-ABILITY RATIO	SHEATH SLIPPAGE	COLOURFAST TO WATER/RUBBING/LIGHT	STATIC STRENGTH WITH FIGURE OF 8 KNOT (15KN / 3 MINS)	CORE /COMPLETE ROPE RATIO	COVER/COMPLETE ROPE RATIO	COVER/COMPLETE ROPE RATIO	STATIC STRENGTH WITH SEWN EYES
TACTIX 12mm Kernmantle Static Rope	ZT12	10.8 g/m	4,204 kg	1,910kg	min 4	1.5% / 6.5%	20%	0.9	1.0 mm	4-5/4-5/6-7	pass (broke at 24.9kN)	AS4142 EN1891	56.6%	43.4%	34.4kN

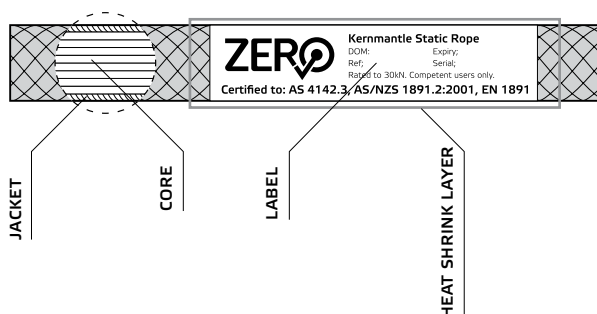

ZERO HEIGHT SAFETY LIMITED

AUSTRALASIA
10 Holt Place, Harewood,
Christchurch 8053, New Zealand
sales.nz@zeroheightsafety.com

EUROPE & UK
Badenerstrasse 122,
5466 Kaiserstuhl, Switzerland
sales.eu@zeroheightsafety.com

zeroheightsafety.com

